


## SL-Twin. TWIN TANK NON-ELECTRIC WATER SOFTENER.

EAN	5027639 900322
Product code	900322
Bathrooms	3 (Up to 5 people)
Under Sink	Yes
Height	495mm
Depth	475mm
Width	215mm
Flow Rate	2700 Litres / Hour
Approximate regeneration time	12 Minutes
Resin volume	4.5 Litre x 2
Salt used per regeneration	450 grams
Water used per regeneration	25 Litres
Inlet & Outlet	3/4" BSP
Drain & Overflow	1/2"
Power Source	None (Water Pressure)
Installation Orientation	Rear
Maximum Ambient Temperature	40°C
Maximum / Minimum Working Pressure	6 bar Max / 1.5 bar Minimum
Maximum Soft Water (at 200 ppm)	750 Litres
Maximum Soft Water (at 300 ppm)	500 Litres
What salt to use	Block
Warranty	5 Years parts 2 Years Labour*

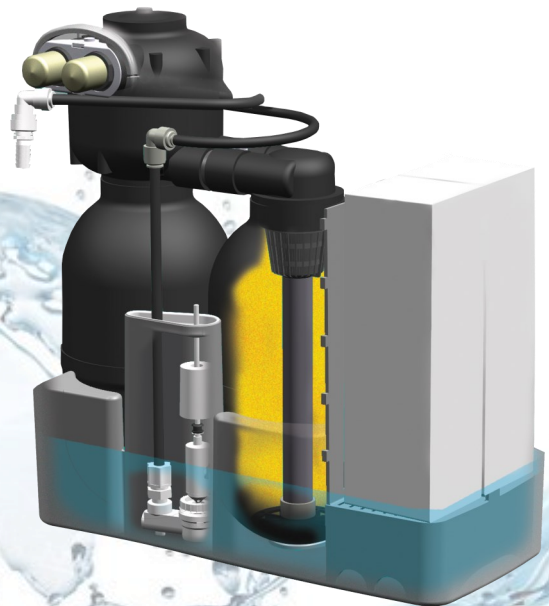

TECHNICAL HELPLINE 01785 811636

**\* IMPORTANT:** To qualify for warranty the softener must be registered and installed in accordance with the Manufacturers installation instructions. Warranty does not cover incorrect installation or setting up of the softener, site damage or resin contamination.